



PRELIMINARY


RM-HP250AU

Remote Control Unit


New Product News



- Multicore camera control unit with cable extension up to 100m
- Both analogue HD/SD signals interface via multicore 26-pin cable
- HD/SD SDI output
- Local remote control capability with optional RM-LP25U

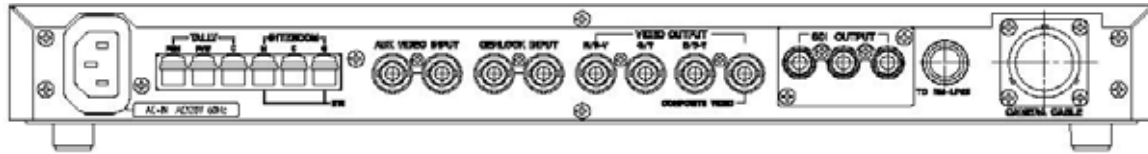

- Camera menu access and control
- 4 user settings assignable to any camera function
- 4 user scene file settings
- Compatible with Sony 26-pin CCU cable
- RTS or 2-wire compatible intercom system
- Compact size of 1U height

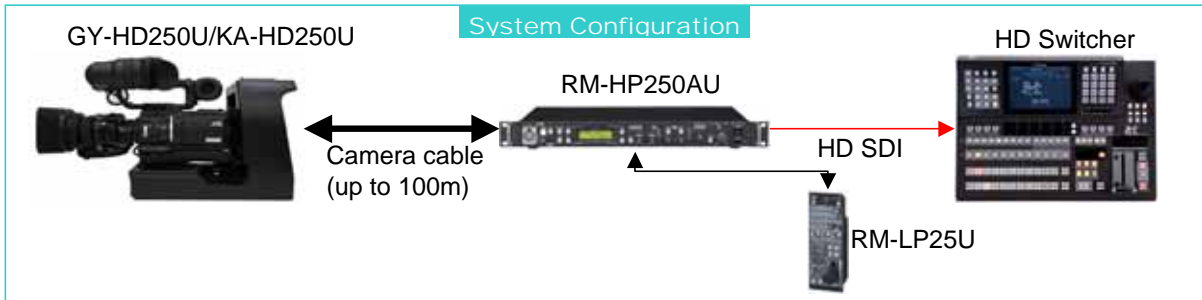

Specifications

Output signals
Analog composite: 1.0Vp-p, 75 ohms, unbalanced(SD only)
Analog component: Y:1.0Vp-p, 75 ohms, unbalanced C:0.7Vp-p, 75 ohms, unbalanced
HD/SD SDI: SMPTE292M compliant HD serial digital signal SMPTE259M compliant SD serial digital signal
Intercom: 2-line system, -10dB, 600 ohms, unbalanced
Input signals
Genlock: BB: SMPTE 170M(RS-170A) compliant(SD) HDTV Tri-sync: SMPTE296M/SMPTE274M compliant
Aux: VBS or VS:1Vp-p, 75 ohms, unbalanced
Intercom: 2-line system, -10dB, 600 ohms, unbalanced
Tally: Contact closure or power(5 to 24V DC or 6V AC)
General
Power requirements: AC 120 V, 60Hz
Power consumption: T.B.A.
Operating temperature: +5 degrees to +40 degrees
Storage temperature: -20 degrees to +60 degrees
Operating humidity: Less than 80%
Dimensions (W x H x D): 465 x 64 x 306 mm
Mass: Approx. 5.5 kg

Options



Remote control unit
RM-LP25U



Camera cable
VC-P110U:5m
VC-P112U:20m
VC-P113U:50m
VC-P114U:100m



Remote cable coupler
KA-280U