

JVC[®]
PROFESSIONAL

13-INCH COLOR VIDEO MONITOR

TM-A13UCV

High-Performance, Compact and
Economical Monitor for a Wide Range of
Professional CCTV Applications



- CPU Control
- Two Composite Video Inputs
- Comb Filter

- Multi-Format Compatible (NTSC/PAL)
- Tough, Lightweight Molded Cabinet

Ruggedly Built, High-Quality CCTV Monitor

JVC's TM-A13UCV delivers the powerful features and the high performance demanded by professional users looking for a rugged, flexible CCTV monitor for use in a wide array of operating environments.

■ Multi-Format Compatibility

The TM-A13UCV accepts both NTSC and PAL input signals. A built-in auto-detection function identifies the input signal and automatically selects the mode.

■ CPU Picture Control

Inside the TM-A13UCV is a central processing unit (CPU) programmed by JVC with default contrast, brightness, chroma, and phase settings. All settings are user-adjustable via front panel controls.

■ Detachable AC Power Cable

The TM-A13UCV receives power through an AC power cable, which is detachable for easy set-up.

■ Ruggedly Built Cabinet

The TM-A13UCV comes in a lightweight, molded cabinet that is built for service in tough environments.


■ Easy Installation

The TM-A13UCV has a mounting hole for rack installation.

■ Comb Filter (NTSC only)

A built-in comb filter improves picture quality by sharply reducing crossed dot interruption.

Rear Panel

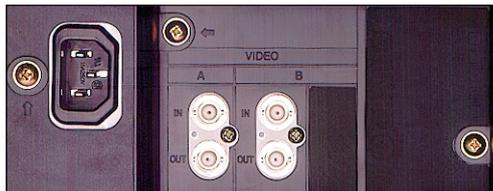

Front Panel




Specifications

Type	Color video monitor
Color system	PAL/NTSC, Auto select
CRT	13" (diagonally measured), in-line guns, stripe pitch of 0.64 mm
Scanning frequency	H: 15.625 kHz (PAL)/15.75 kHz (NTSC) V: 50/60 Hz
Horizontal resolution	320 TV lines (NTSC)
Power requirement	120 V AC, 50/60 Hz under CE
Power consumption	0.77 A
Color temperature	6,500°K
Input terminals	
1. Input A: Composite video	1.0 V (p-p), 75 ohms, negative sync., auto-termination, BNC x 2, bridged-out possible
2. Input B: Composite video	1.0 V (p-p), 75 ohms, negative sync., auto-termination, BNC x 2, bridged-out possible
Weight	21 lbs. (9.6 kg)
Option	7U rack mountable

Dimensions

Unit: inches (mm)

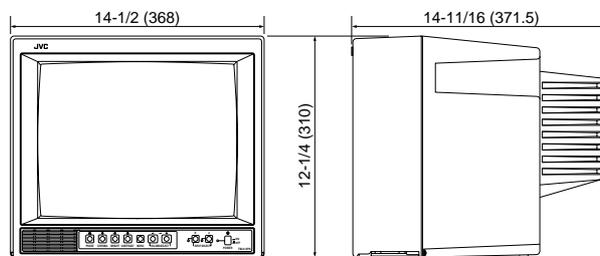

Design and specifications subject to change without notice.

JVC®

DISTRIBUTED BY

JVC PROFESSIONAL PRODUCTS COMPANY
DIVISION OF JVC AMERICAS CORP.
1700 Valley Road, Wayne, N.J. 07470
TEL: (973) 315-5000, (800) 582-5825
FAX: (973) 315-5030
E-mail: proinfo@jvc.com

JVC CANADA INC.
21 Finchdene Square, Scarborough, Ontario M1X 1A7
TEL: (416) 293-1311 FAX: (416) 293-8208
Internet Web Site <http://www.jvcpro.com/>

Printed in Japan
ICZ-0215