
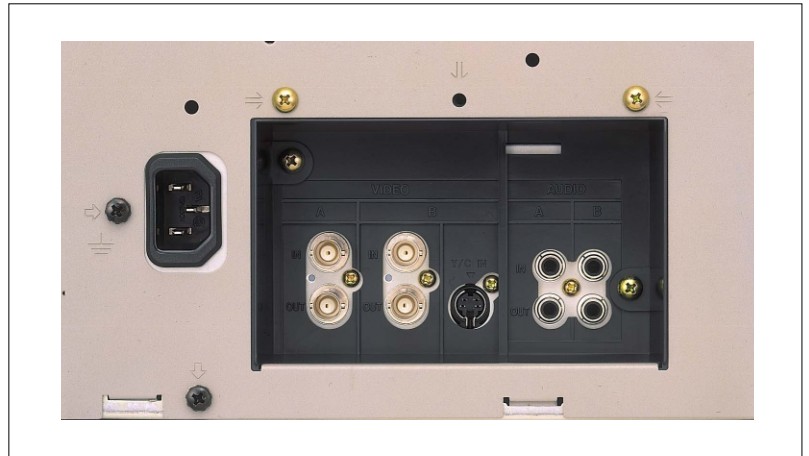


13-Inch Color Video Monitor

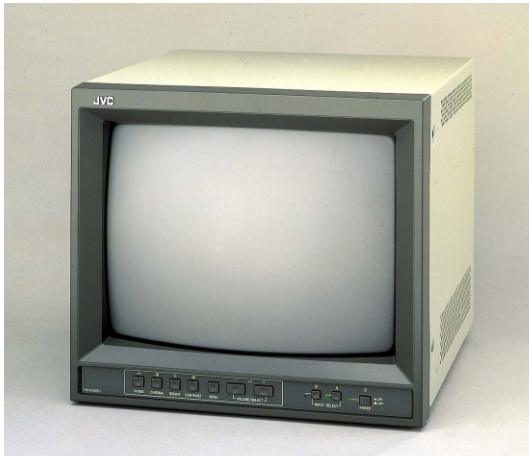

FEATURES

- Comb Filter
- Two Composite Video Inputs
- One Y/C Input
- Two Audio Inputs
- Multi-Format Compatible (NTSC/PAL)
- Built-in Speaker
- Durable Metal Cabinet

ARCHITECTS' AND ENGINEERS' BID SPECIFICATION

The 13" NTSC/PAL (selectable) color video monitor shall be a JVC TM-A130SU equal or better.

The monitor shall feature a 13" screen with horizontal resolution of 320 lines center, 2 video inputs/outputs (BNC) loopthrough and 2 audio inputs/outputs (RCA). Front controls shall include the POWER SWITCH, INPUT SELECTOR SWITCH, TINT CONTROL, COLOR CONTROL, BRIGHTNESS CONTROL, CONTRAST CONTROL, PICTURE CONTROL, AUDIO VOLUME CONTROL and SCREEN CONTROL. The monitor is 7U rack mountable. The power source is 120V AC, 50/60Hz. The monitor is UL listed.

Specifications

Type	Color video monitor
Color system	NTSC/PAL, Auto select
CRT	13" (diagonally measured), in-line guns, stripe pitch of 0.64 mm
Scanning frequency	H: 15.625 kHz (PAL)/15.75 kHz (NTSC) V: 50/60 Hz
Horizontal resolution	More than 320 TV lines
Power requirement	120 V AC, 60 Hz
Power consumption	0.87 A
Color temperature	6,500°K
Inputs	
1. Input A: Composite video	1.0 V (p-p), 75 ohms, negative sync., auto-termination, BNC x 2, bridged-out possible
2. Input B*: Composite video	1.0 V (p-p), 75 ohms, negative sync., auto-termination, BNC x 2, bridged-out possible
Y/C	Y: 1.0 V (p-p), 75 ohms, negative sync.
C:	0.3 V (p-p), 75 ohms (PAL) 0.286 V (p-p), 75 ohms (NTSC)
Audio connectors	RCA pin x 2 for input A and input B channels, bridged-out possible
Audio speaker	8 cm round, 1 W output
Power cord	Detachable type
Weight	27 lbs. (12.2 kg)
Option	7U rack mountable

*The Y/C terminal is given priority.

Dimensions

