



DLA-RS66

4K Precision 3D Enabled D-ILA
Home Theater Projector

REFERENCE SERIES

The most advanced D-ILA home theater projector with a native contrast ratio of 130,000:1 upconverts 2D material to stunning 4K Precision and produces remarkable theater quality 3D



- 130,000:1 Native Contrast Ratio
- 1080p Three Chip 3D Enabled D-ILA Projector built from hand selected, perfectly matched components
- 4K e-shift 2 (3840 X 2160) 4K Precision
- 1.4 to 2.8:1 motorized zoom lens with Horizontal and Vertical offset
- New 230 Watt NSH Illumination System (improves lamp life to 4,000 hours in Normal Mode)
- THX® and ISF Certified
- Multiple Pixel Control with JVC's 8 Band Detection — 2K to 4K Upscaling Engine
- Highly customizable built-in 2D to 3D converter creates dynamic 3D images from 2D video content
- Upgraded lens memory function memorizes 10 positions of focus, zoom and shift enabling recall of a variety of aspect ratio configurations
- Control: LAN / RS-232C / IR / 12 V Screen Trigger Output / New remote control with 3D functions
- Automatic, motorized lens cover protects the lens when the projector is not in use

Note: Optional 3D Glasses (PK-AG3 or PK-AG2) and 3D Synchro Emitter (PK-EM2 or PK-EM1) are required for viewing images in 3D.

4K
e-shift2

FullHD
1920x1080

D-ILA

3D

isf
cert

THX
DISPLAY

JVC 4K e-shift 2 Projection 4K Precision


JVC's totally revamped optical engine incorporating three D-ILA imaging devices and new 4K e-shift 2 technology provides improved contrast and natural color tones. New 4K e-shift 2 samples a much wider area (12X more pixels) which results in improved edge transitions, zero aliasing and stair stepping for an image with 4X the pixel density of the original content.



Multiple Pixel Control (Upscaling engine for 4K e-shift 2)

Multiple Pixel Control expands the detection range 10 times more than conventional models making it possible to detect a much wider range of signal bands — from 2 bands to 8 bands — and delivers much more accurate smoothing and enhancements.

e-shift 2 Technology's Image Processor: Multiple Pixel Control

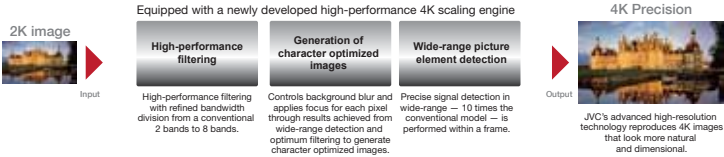

Effects Achieved with Multiple Pixel Control



130,000:1 Native Contrast Ratio

The DLA-RS66 achieves the industry's highest native contrast ratio of 130,000:1* with the adoption of high-grade parts and an optimized optical engine with new wire grid polarizer. No dynamic iris or active circuitry is used to artificially enhance the contrast ratio — every frame of content projected has wide dynamic range from peak whites to deep blacks to ensure superb picture quality with a heightened sense of immersion and depth.



D-ILA 3D Projection*


There's nothing like 3D to immerse you into the scene and the DLA-RS66 uses the frame sequential method which provides separate left-eye and right-eye images through synchronized active shutter glasses. This year 3D performance has been significantly improved with a new cross-talk canceler.

The DLA-RS66 is also compatible with a wide range of 3D signals provided via Blu-ray or set-top box through its HDMI 1.4a inputs. Signals formats may include full L/R HD (frame packing) including 1080/24p and 720/60p side-by-side. The DLA-RS66 is equipped with a parallax adjustment that allows the user to control the horizontal offset between the two channels for the most pleasing effect. 3D scaling is provided for use with anamorphic lenses.

• 2D-3D Conversion: The DLA-RS66 performs real-time conversions of 2D high definition video sources into high-quality, impactful 3D thanks to JVC's 2D-3D converter. Now, 2D video recorded on camcorders and TV broadcasts can be converted into 3D video instantaneously for home stereoscopic viewing enjoyment.

*An optional 3D Synchro Emitter and 3D glasses are required to view 3D images.

External Dimensions (unit: inches | mm)

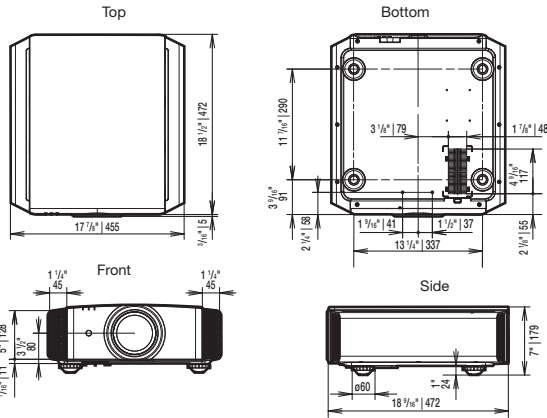

Connectors



Optional Equipment



Specifications

DLA-RS66	
Device	0.7 inch Full HD D-ILA (1920 x 1080) x3
e-shift 2 Technology	Yes
Resolution	1920 x 1080
Lens	2X Zoom & Focus: Motorized f=21.4-42.8mm / F=3.2-4
Lens Shift	±80% Vertical and ±34% Horizontal (motorized)
Light Source Lamp	NSH 230W (Part # PK-L2312U) (lamp life: approx. 4000 hours when the lamp is in normal mode)
Contrast Ratio	Native: 130,000:1
Connectors	Component 1 (RCA; Y, Pb/Cb, Pr/Cr)
	HDMI 2 (3D/Deep Color/CEC compatible)
	Analog RGB PC 1 (D-sub 15pin)
	RS-232C 1 (D-sub 9pin)
	LAN (RJ-45) 1
	Control and Firmware Upgrade 1
	Trigger 1 (Mini jack, DC12V/100mA)
	Remote 1 (Stereo Mini jack)
Video Input Signal Format	3D Sync 1 (Mini Din 3pin)
	Digital 480i/p, 576i/p, 720p 60/50, 1080i 60/50, 1080p 60/50/24
	Analog 480i/p, 576i/p, 720p 60/50, 1080i 60/50
PC Input Signal Format	HDMI VGA/SVGA/XGA/WXGA/WXGA+/SXGA/WSXGA+/WUXGA
	Analog RGB VGA/SVGA/XGA/WXGA/WXGA+/SXGA/SXGA+/WSXGA+/1920x1080/Mac 13", 16", 19"

Projection Distance Chart

Display size (16:9)					Projection distance				
Screen diagonal (in.)	Width (in.)	Height (in.)	Width (mm)	Height (mm)	Width (in.)	Wide (feet)	Tele (m)	Tele (feet)	Tele (m)
60	1.328	52.28	747	29.41	1.78	5.84	3.66	12.01	
70	1.549	60.98	872	34.33	2.09	6.86	4.28	14.04	
80	1.771	69.72	996	39.21	2.40	7.87	4.89	16.04	
90	1.992	78.43	1,121	44.13	2.70	8.88	5.51	18.08	
100	2.214	87.17	1,245	49.02	3.01	9.88	6.13	20.11	
110	2.435	95.87	1,370	53.94	3.31	10.88	6.75	22.15	
120	2.656	104.57	1,494	58.82	3.62	11.88	7.36	24.15	
130	2.878	113.31	1,619	63.74	3.92	12.88	7.98	26.18	
140	3.099	122.01	1,743	68.62	4.23	13.88	8.60	28.22	
150	3.320	130.71	1,868	73.54	4.53	14.88	9.22	30.25	
160	3.542	139.45	1,992	78.43	4.84	15.88	9.84	32.28	
170	3.763	148.15	2,117	83.35	5.14	16.88	10.45	34.28	
180	3.984	156.85	2,241	88.23	5.45	17.88	11.07	36.32	
190	4.206	165.59	2,366	93.15	5.75	18.88	11.68	38.32	
200	4.427	174.29	2,490	98.03	6.06	19.88	12.30	40.35	

Lens Zoom Range: 1.4 - 2.8:1 ± 5% Design Tolerance
Projector Throw Distance = Screen Width x Zoom Lens Setting

Notes about viewing 3D video content

• The optional 3D Synchro Emitter and 3D glasses are required to view 3D images. 3D video software (3D media or output of 3D broadcasts) and a 3D-compatible video player are also required. • Perception of 3D images will vary with individual viewers. • Stop viewing 3D images immediately if any discomfort such as headaches, dizziness, eye fatigue, etc. occurs. • Viewing of 3D images by children under the age of five is not recommended. • Read the Safety Precautions in the User Manual carefully before viewing any 3D source.

• The projector is equipped with a new super high pressure mercury lamp, which may break, emitting a loud noise, when it is subjected to shock or after it has been used for some length of time. • Please note that, depending on how the projector is used, there can be considerable difference between individual lamps regarding how many hours they will operate before requiring replacement. • An additional payment is required for installation of a new lamp, if necessary. • The projector lamp requires periodic replacement and is not covered by warranty. • Please be aware that, because the D-ILA device is manufactured using highly advanced technologies, 0.01% or fewer of the pixels may be non-performing (always on or off).

Design and specifications are subject to change without notice. All pictures on this brochure are simulated. Adobe is a trademark or registered trademark of Adobe Systems Incorporated in the U.S. and/or other countries. ISF is a registered trademark of Imaging Science Foundation, Inc. THX and THX logo are trademarks of THX Ltd., which may be registered in some jurisdictions. HDMI, the HDMI logo and High-Definition Multimedia Interface are registered trademarks of HDMI Licensing LLC. All other brand or product names may be trademarks and/or registered trademarks of their respective owners. Any rights not expressly granted herein are reserved.

Copyright © 2013, JVC KENWOOD Corporation. All Rights Reserved.



DISTRIBUTED BY

pro.jvc.com

Printed in the U.S.A.

"JVC" is the trademark or registered trademark of JVC KENWOOD Corporation.