

JVC

DLA-VS4600

Visualization Series™ D-ILA Projector

BLU *Escent*

Laser-Phosphor Illumination
with Frame-Encoded Dynamic Laser Control

4096x2160
Native Resolution

120Hz Frame Rate

Stimulated NVG
Compatible

Digital Smear Reduction with
Black Frame Insertion

>12,000:1 Contrast Ratio



*Shown with optional lens

D-ILA®

● Features

- Laser-Phosphor Illumination System with long life for Low Operating Cost and Consistent Performance
- 3 Active Matrix, 0.69" Digital D-ILA Devices
- 4096x2160 Native Resolution
- 4000 Lumens (typical) - 3200 Lumens (minimum)
- Contrast Ratio - >12,000:1 minimum)
- 12-Bit Color Bit Depth via DisplayPort 1.2a Inputs
- 6-Axis Color Management System w/12-Bit Gamma Correction
- Color Gamut - Default Calibration - sRGB / REC. 709 (93%)
- Improved Digital Smear Reduction w/120Hz Laser Pulse Control
- Low-Latency Signal Processing
- 50Hz, 60Hz, 120Hz Synchronous Operation
- Comprehensive LAN/RS232 Control Protocol
- 100%>25% Illumination Control (125 steps)
- Built-in Auto Intensity and Color Calibration for reduced maintenance
- Frame-Encoded Dynamic Laser Control (FEDLC)
- Improved IR output/performance for stimulated NVG
- User Adjustable Gamma Presets
- Long-life Wiregrid Polarizers and Inorganic Optical Components
- Fixed and Zoom Lens Options Available
- Custom Fixed and Adjustable Lens Mount Options Available
- Flexible Orientation - Unlimited Pitch and Roll
- 11x11 Matrix, 1/16 pixel Micro-Convergence Control
- Easy Access Front Panel for Lens/Mount Access
- USB Configuration Save/Restore Capability
- Motion Compatible for Simulation applications

*Shown with optional lens

Specifications

| | |
|--------------------------------------|--|
| Image Device | 3 D-ILA devices (0.69 inches diagonal) 4096 x 2160, >90% Aperture Ratio |
| Brightness | 4000 ANSI Lumens (typical) - 3200 Lumens (minimum) with SPS polarization |
| Display Resolution | 4096 x 2160 Pixels |
| Contrast Ratio | Greater than 12,000:1 (Sequential) |
| Uniformity | Greater than 78% |
| Input - Supported Resolutions | 640x480, 1920x1080, 2048x1080, 1600x1200, 1920x1200, 2048x1536, 2560x1600, 3840x2160, 4096x2160 |
| Input modes | 50Hz, 60Hz, 120Hz - Single, Dual, Quad Stripe or Quadrant Mode |
| Latency | 30ms@50Hz, 25ms@60Hz, 16.6ms@120Hz |
| Color Bit Depth | 12-bit Input, 12-bit Display |
| I/O Terminals | DisplayPort 1.2a x 4, LAN, RJ45 x 1, RS-232C, D-Sub 9 pin (male) x 1 Wired Remote (Mini) x 1, USB (for Service), Sync Out |
| Remote Control | RS-232C/LAN Fully featured control protocol - Wired/IR Remote Control |
| Projection Lens (optional) | VSL_40FE Dual Cove Lens - ± 62% V, ± 9% H, ± 37% Vertical Angle GLMZ-4009SZ 0.94-1.3:1 - Zoom Lens, ± 50% V, ± 18% H Offset GLMZ-4014SZ 1.27-2.54:1 - Zoom Lens, ± 100% V, ± 40% H Offset PK-MLS01 -Motorized lens mount option, ±100% V, ±34% H offset |
| Light source | Blue Laser/Excited Phosphor - 20,000hrs to 50% output at full power User-Adjustable, 125 steps, 100%-25% Power Level, Auto-Intensity function 8-step Illumination System Aperture Control |
| Auto Intensity | Internal Auto Intensity and color calibration |
| Power Requirement | AC 100V-240V, 50/60Hz (single phase) |
| Power Consumption | 750 Watts Maximum, 1.5W Standby |
| Noise Level (0-26°C, 32-79°F) | <45dB (A) at 39.4"/1m (3.3ft) |
| Operating Altitude | <6600ft (2000m) for safe operation |
| Installation Orientation | Any Orientation is supported - unlimited pitch and roll - motion compliant |
| Airflow Requirements | 106cfm (3m³) per minute minimum |
| Dimensions (W x H x D) | 19.7" x 8.46" x 28.3" (500 x 215 x 720mm) |
| Weight | 77lbs, (35kg) - Lens additional |
| Supplied Accessories | Power Cord x 2 (US, EU) *Instruction manual is available from the JVC site |
| Approvals | Safety - CSA C22.2 No.60950-1-07 /UL60950-1 2nd (NA), IEC60950-1:2005/ A1:2009/A2:2013, EN60950-1:2006/A11:2009/A1:2010/A12:2011/A2:2013 (EU) GB4943, 1-2011 (China) Safety (Laser) - IEC60825-1 Ed2:Class 3R, (US), IEC60825-1 Ed3:Class 1 EMI - FCC PART 15 SUBPART B, CLASS A (US), ICES-003 Issue 5:2012 CLASS A (CAN), EN61000-3-2, EN61000-3-3, EN55032 (Class A), EN55022 (Class A), EN55024 (EU), CISPR22-2009/A1:2010 Class A (AS/NZ) GB9254-2008, GB17625.1-2012 (China) Environmental - RoHS, Proposition 65 (US), WEEE, REACH, New Battery Directive (EU) |
| Warranty | Two-Years Parts and Labor (per JVC Limited Warranty) |

Accessories

VSL-40FE
Dual Cove Lens




GLMS-4009SZ
0.94-1.3:1 Zoom Lens



GLMZ-4014SZ
1.27-2.54:1 Zoom Lens



PK-MLS01 Motorized
Lens Mount Option

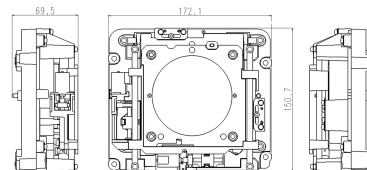

DLA-VS4600
Rear View



FLT-VS45
Motorized Filter
Holder

JVC

2201 E. Dominguez Street
Long Beach, CA 90810

<http://pro.jvc.com/visualization>

JVCKENWOOD

D-ILA is a trademark of JVCKENWOOD Corporation
E.&O.E., Design and specifications are subject to change without notice.
All brand names and product names are trademarks, registered trademarks,
or trade names of their respective holders.

Copyright 2018, JVCKENWOOD Corporation
All rights reserved