

Digital Presenter


AV-P1000U

98

- High-resolution 1280 x 960 pixels equivalent to SXGA images without degradation or flicker
- RGB (SXGA to VGA) or NTSC output for easy integration into any system
- Simultaneous split screen display of picture from memory together with live image
- 3-picture memory
- Smooth transitions with freeze function to keep your presentation running smoothly
- 20x zooming with the 4x electronic zoom combined with the 5x power zoom
- 8-point character clearly displayed when fonts such as Arial Bold are used
- Camera head rotation control for camera panning
- Flip-type close-up lens
- Slide film holder
- 5-position arm with panning camera
- Full flat stage for large and wide objects
- Wireless remote control
- On-screen display
- RS-232C serial interface allowing control of useful functions from a personal computer
- Camera/PC input selector
- Book holder
- Pointer indication
- Industry standard 15-pin "D" connector
- 75-ohm composite video outputs for connection to a video monitor or TV receiver/monitor



Control Panel

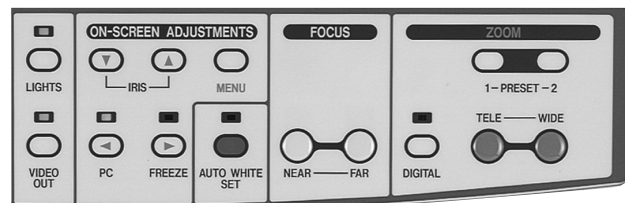

Remote control unit



Rear Panel

