

Digital Presenter


AV-P1000U System




Inspection



Product presentation

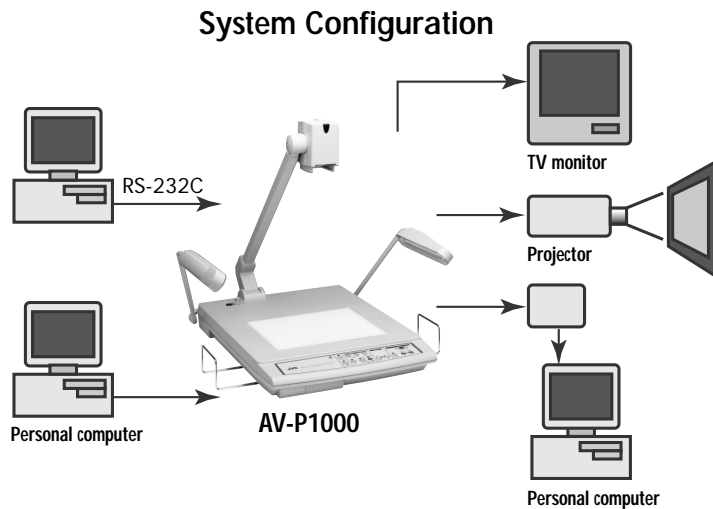

Education



Conference



Teleconferencing

GENERAL	
Power requirements	AC 100 V to 120 V, 50/60 Hz
Power consumption	40 W
Operating temperature	5°C to 40°C (41°F to 104°F)
Humidity	30% to 85%
Dimensions (WHD)	740 x 636 x 690 mm (open) (29-3/16" x 25" x 27-3/16") 450 x 236 x 706 mm (closed) (17-3/4" x 9-3/10" x 27-13/16")
Weight	9.2 kg (20.3 lbs.)
OPTICAL	
Lens	F2.9 to F3.1, f = 6.4 mm to 32 mm (5x zoom)
Shooting area	350 x 260 mm max. (13-13/16" x 10-1/4") 75 x 56 mm min. (3-1/16" x 2-1/4")
Focal distance	100 mm (3-15/16") above the platform surface (with close-up lens) ∞ to 0.8 m (2.6 ft) (without close-up lens)
Zoom	Motorized (user control)
Focus	Auto/Motorized
Iris	Auto (with fine-tuning)/manual
LIGHTING	
Side lamp	2 x 6 W (fluorescent)
Backlight panel	2 x 6 W (fluorescent)
Backlit area	Letter size, horizontal 297 x 211 mm (11.7" x 8.3")

CAMERA HEAD			
Image pickup device	1/2.7" interline-transfer CCD		
Total number of pixels	1,300,000		
Crawler frequency	RGB output	H	V
	1280 x 960	64.0 kHz	60.0 Hz
	1024 x 768	48.4 kHz	60.0 Hz
	800 x 600	37.9 kHz	60.3 Hz
	640 x 480	31.5 kHz	59.9 Hz
Video output	15.75 kHz	50 Hz	
White balance	Auto (with fine tuning)/manual		
Contour correction	Available		
Color/monochrome selection	Yes		
Input select	Camera/PC		
INPUT/OUTPUT			
Input terminals			
RGB:	D-SUB 15-pin x 1, BNC x 1 set,		
Video:	RCA x 1		
DC:	12 V socket x 1		
Output terminals			
RGB:	D-SUB 15-pin x 1, BNC x 1,		
Video:	RCA x 1		
DC:	12 V socket x 1		
ACCESSORIES			
Provided	Instruction manual x 1, power cable x 2, wireless remote control x 1, "AA" battery x 2		
Option	4" LCD color monitor with bracket (TA-AV-Z7U)		