



1/4" CCD DSP Active Movement 145 Degree Colour Dome Camera

TK-AM200U

134



- 1/4" IT CCD 440,000 Pixels
- Fixed Lens (f=2.2 mm)
- Sensitivity: 4 lx with Cover
1.5 lx without Cover
- Direct Drive Motor for Pan and Tilt
- Maximum Panning and Tilting Speed:
120 Degrees/sec.
- The Range of Panning and Tilting:
Total 60 Degrees with Coverage Over an Angle of 145
Degrees (Pan) and 125 Degrees (Tilt)
- 16 Preset Positions
- Built-in Menu
- 2x Electronic Zoom
- Auto Patrol Mode
- Programmable Backlight Compensation
- Panic Alarm (1 ch)
- Control Signals: RS-232C, RS-422A or RS-485
- Compact, Durable Design
- Optional Remote Unit RM-P2580U
- AC 24V

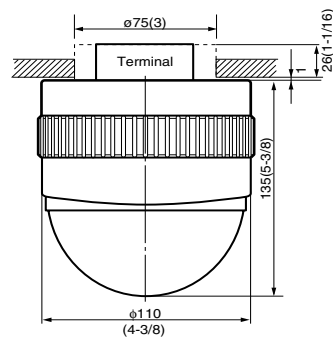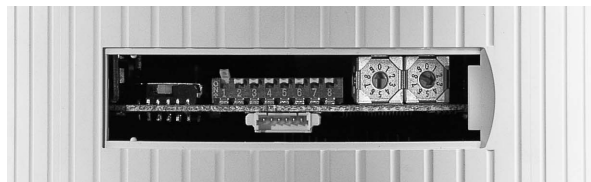

Unit: mm/inches