


8 Dome Camera Controller with Switching

RM-P2580

138

- Independently control Pan, Tilt, Zoom, Focus, Iris and Setup menus for 8 TK-C675B dome cameras up to a 3900 feet (1.2 km) communication cable length.
- Joy-stick and Push button control.
- Built-in 8 channel sequential switching function.
- Auto Panning movements can be programmed for each camera.
- Auto Patrol programs can be set for up to 8 fine patterns across up to 64 preset positions per each camera, including sequence and viewing time interval.
- Auto Alarm Operation:
Alarm Priority mode interrupts pre-programmed operations to view scene where activated. Visual and audio alarms are activated, as well as triggering peripheral alarm equipment
Manual Priority mode displays camera ID of affected area, but operation remains unaffected
- Control of Area title function, allocates a 16 character ID to 16 pre-set camera areas, and allows one touch positioning to those areas
- Operation Lock function disables joystick and keypad to prevent operating errors.
- Remote Control Interfaces: RS-485 for camera, RS-232C for external units such as Time-lapse VTR or frame switcher.
- 8 video inputs with additional 8 loop through outputs.
- One push auto focus

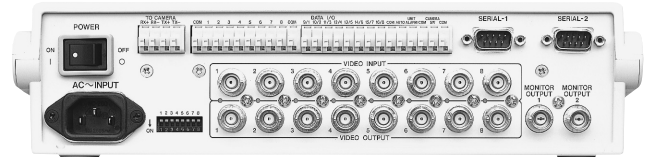

Controllable camera	TK-C675B						
Number of connectable cameras	Mode A: 8 units Mode B: 16 units						
Cable length	Up to 1.2 km						
Data I/O terminals	Up to 16						
Alarm inputs/outputs	Up to 16						
Unit alarm output	1 line (open collector)						
Auto output	1 line (open collector)						
Camera switching circuit	1						
Video I/O	<table border="0"> <tr> <td>Number of inputs</td> <td>8 BNC (loop through)</td> </tr> <tr> <td>Line level</td> <td>Composite, 1V(p-p)</td> </tr> <tr> <td>Number outputs</td> <td>2 BNC</td> </tr> </table>	Number of inputs	8 BNC (loop through)	Line level	Composite, 1V(p-p)	Number outputs	2 BNC
Number of inputs	8 BNC (loop through)						
Line level	Composite, 1V(p-p)						
Number outputs	2 BNC						
Supply voltage	AC 100 - 240 V						
Power consumption	Approx. 3W						
Ambient temperature	(operating) -10 to 50 °C(14°F to 122°F) (recommended) 0 to 40 °C(32°F to 104°F)						
Weight	Approx. 1.5 kg(3,31lbs.)						

