
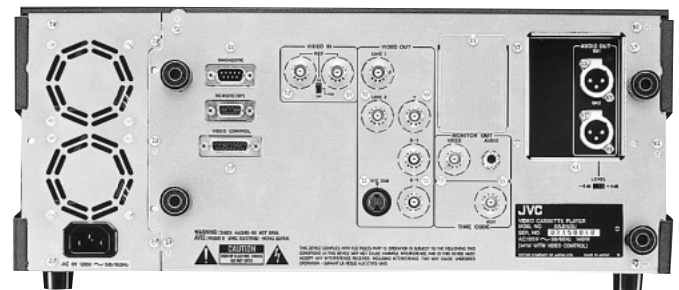


BR-D51U

BR-D50U

14

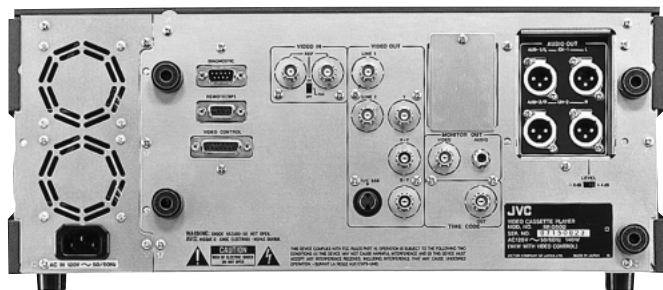

BR-D51U: S-VHS compatible

- 2 hour S-VHS playback
- Two S-VHS Hi-Fi audio plus two S-VHS normal audio channel outputs

Both BR-D51U and BR-D50U

- Editing Feeder/Players
- High quality 50Mbps, 8 bit, 4:2:2 D-9 playback
- 2 hour (124 minute) playback time with DS-124 cassette
- $\pm 1/3$ variable speed playback (field / frame selectable) in Digital S mode
- Jog / shuttle control
- Analog I/O: Composite, Y/C, Component (Y, R-Y, B-Y)
- Two 16 bit 48kHz PCM audio channels
- Two Digital S cue audio tracks for precise audio editing
- Front panel TBC adjustment of System, SC and video phases
- Remote TBC adjustment via 15 pin D-Sub connector including video level, chroma phase, chroma level, and pedestal level
- RS-422A standard editing and control with external editing controllers
- RS-232C serial port for diagnostics
- LTC / VITC time code
- Rugged die cast chassis using ceramic tape guide rollers and sapphire flanges for long life
- Center rotating head design for long head life

Options

- SA-D50U: Optional SMPTE 259U serial digital output and optional AES / EBU serial audio output
- SA-K67U: Rack mount
- RM-G22U: TBC remote control unit

Optional Accessories



SA-D50U
Serial Digital Interface



SA-K67U
D-9 series Rack Mount